



Twin 60 Residential Sliding & Folding Door Systems

Door Specifications

- Maximum Door Weight: 27kg
- Door Thickness: 16-44mm
- Door Construction:
Frame width 30mm minimum to accommodate top track. Door width one quarter height minimum, handle height two thirds from bottom for best results.
- Maximum Door Width: 1m
- Maximum Door Height: 2m
- Track Dimensions: 19mm (w) x 27mm (h)

Hardware Specifications

- Soffit fixed anodised aluminium top track
- Smooth and quiet operation due to nylon wheeled hangers
- No recessed bottom tracks required
- For bi passing cupboard and wardrobe doors of timber construction
- Bottom guides may be rebated, surface fixed or a recess routed into the bottom of the door to allow guide to be offered

Twin 60


Residential Sliding & Folding Door Systems

Product Overview

Twin 60 is the ideal sliding system for lightweight wardrobe doors, its nylon wheeled hangers ensure a smooth operation and minimal maintenance once installed.

Technical Specification

TWIN 60

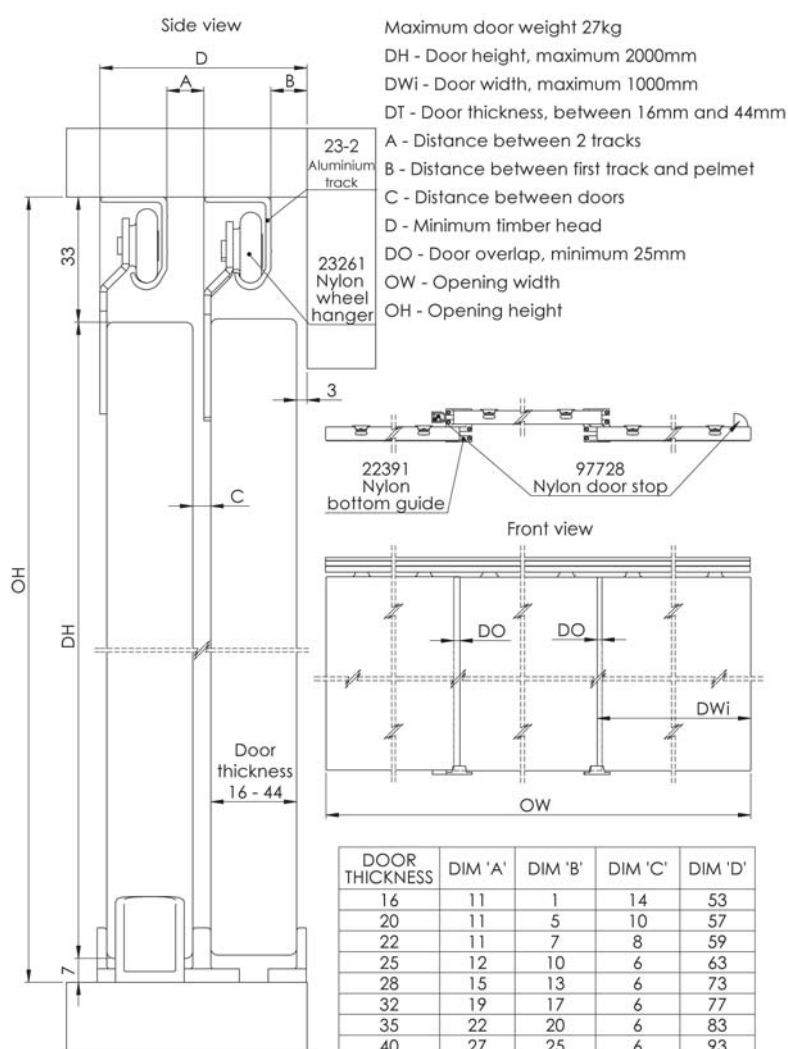

Article No.	Description	Image
06004	Trackset for two doors within a 1.2m opening	
06005	Trackset for two doors within a 1.5m opening	
06006	Trackset for two doors within a 1.8m opening	
06008	Trackset for three doors within a 2.4m opening	
06021	Single door component pack	
232	Anodised aluminium top track available in 1.2, 1.5, 1.8 and 2.4m lengths	
23261	Hanger pack	
22391	Nylon guide	
30627	Soft closer kit (one per door needed)	
97728	Door stop	
95683	Circular flush pull Ø65mm, stainless steel, pair (For our full range of accessories see pages 96-97)	

Trackset contents: 2 lengths of aluminium top track, bottom guides, hangers, door stops and all woodscrews.

Component pack contents: Pair of hangers, guides, door stop and all woodscrews.



For further information please contact us:
 Tel: +44 (0)20 8545 6680 sales@coburn.co.uk www.coburn.co.uk

